


3/8" thick Finnish birch
or Baltic birch
(marine grade plywood
as third choice)


For details of compound
curve side see sheet 2

**MG TD & TF
Midget
Floorboard
Drawings**


Roy Challberg
Sheets 1 through 6
Rev. 6
11-26-2013

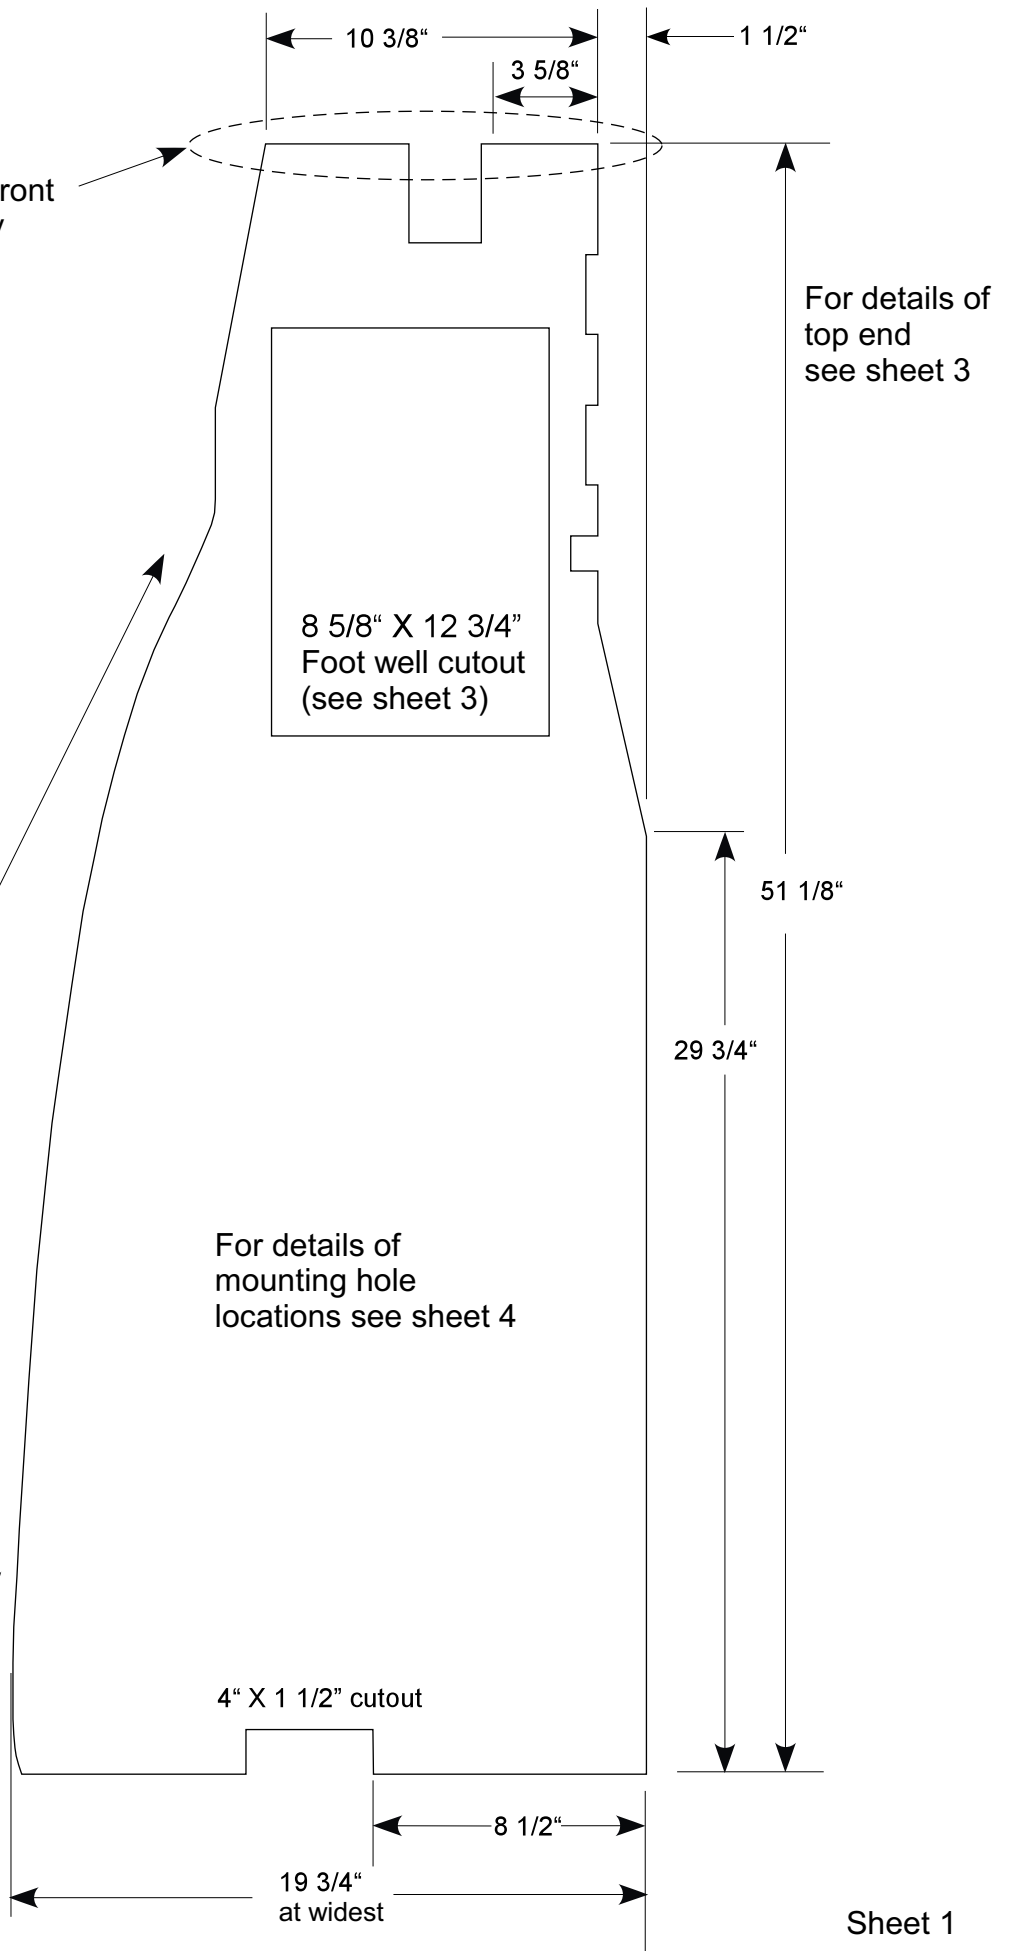

Driver's Side Floorboard Compound Curve

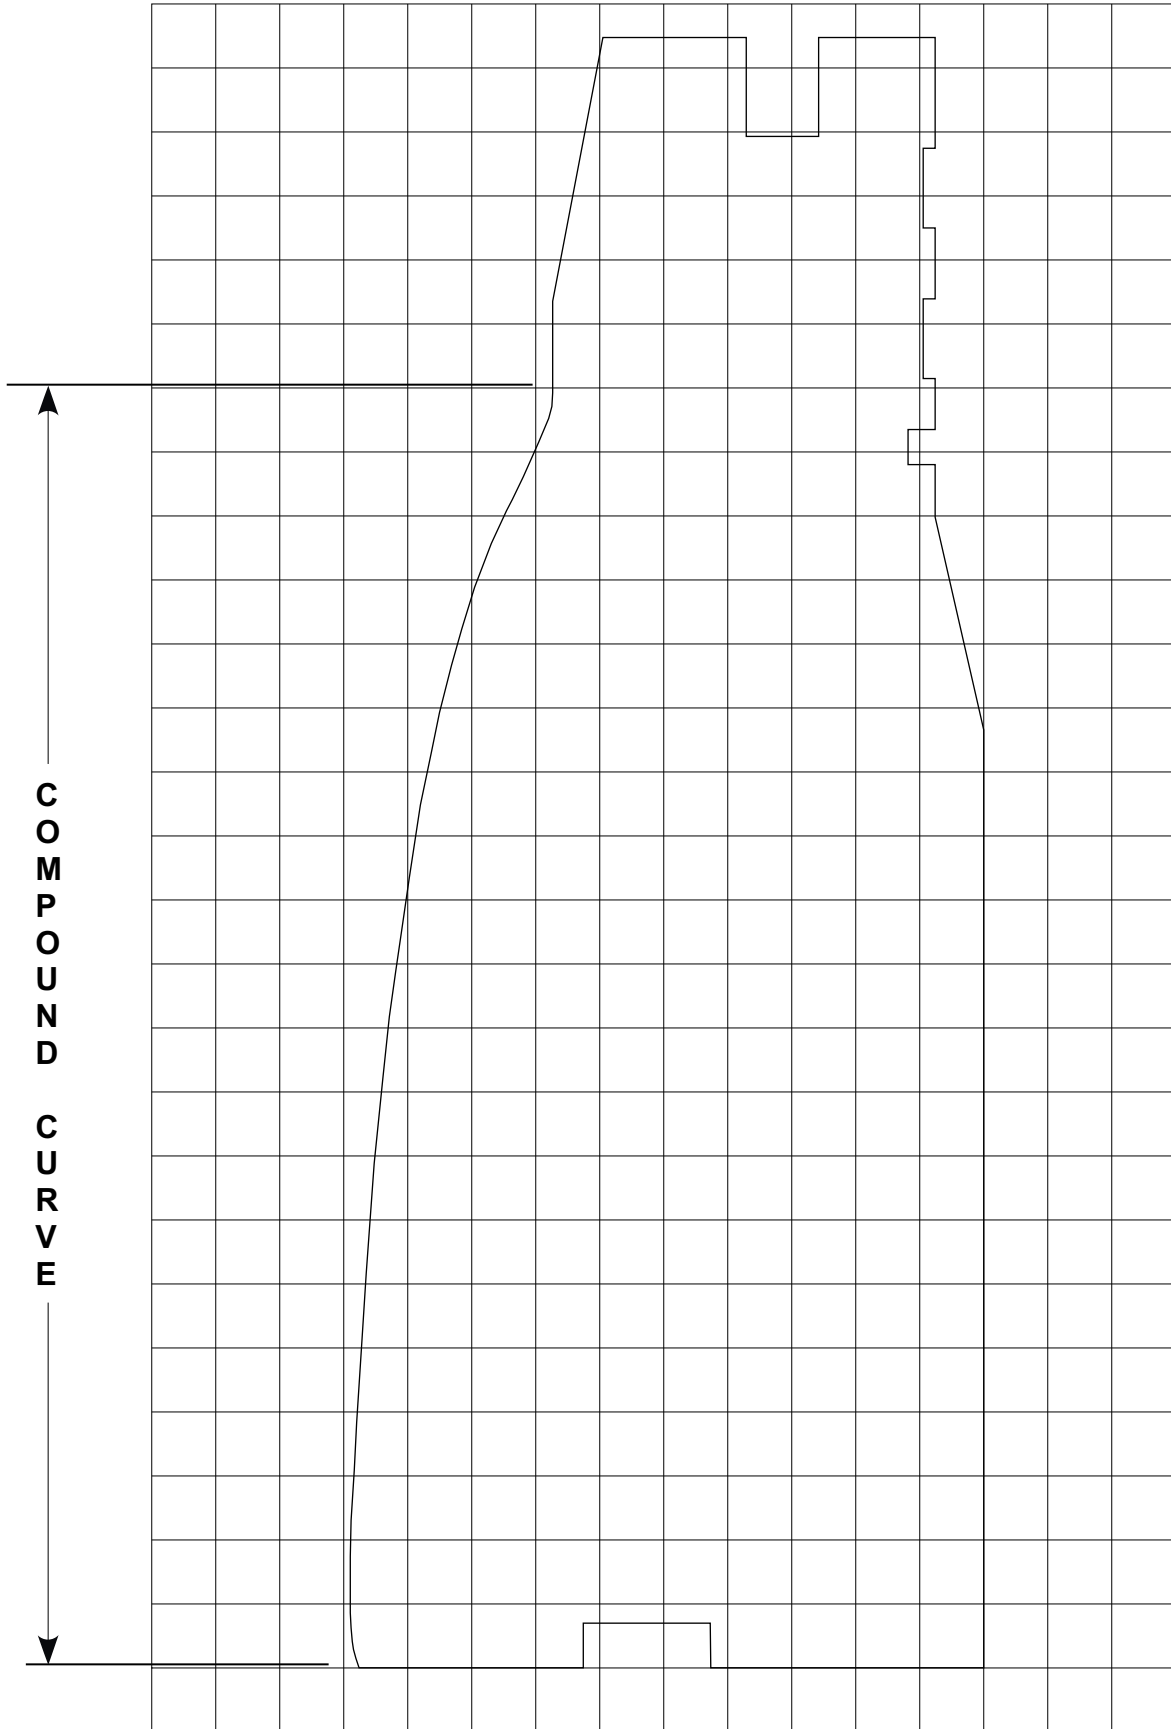

Grid sizes 2" by 2"

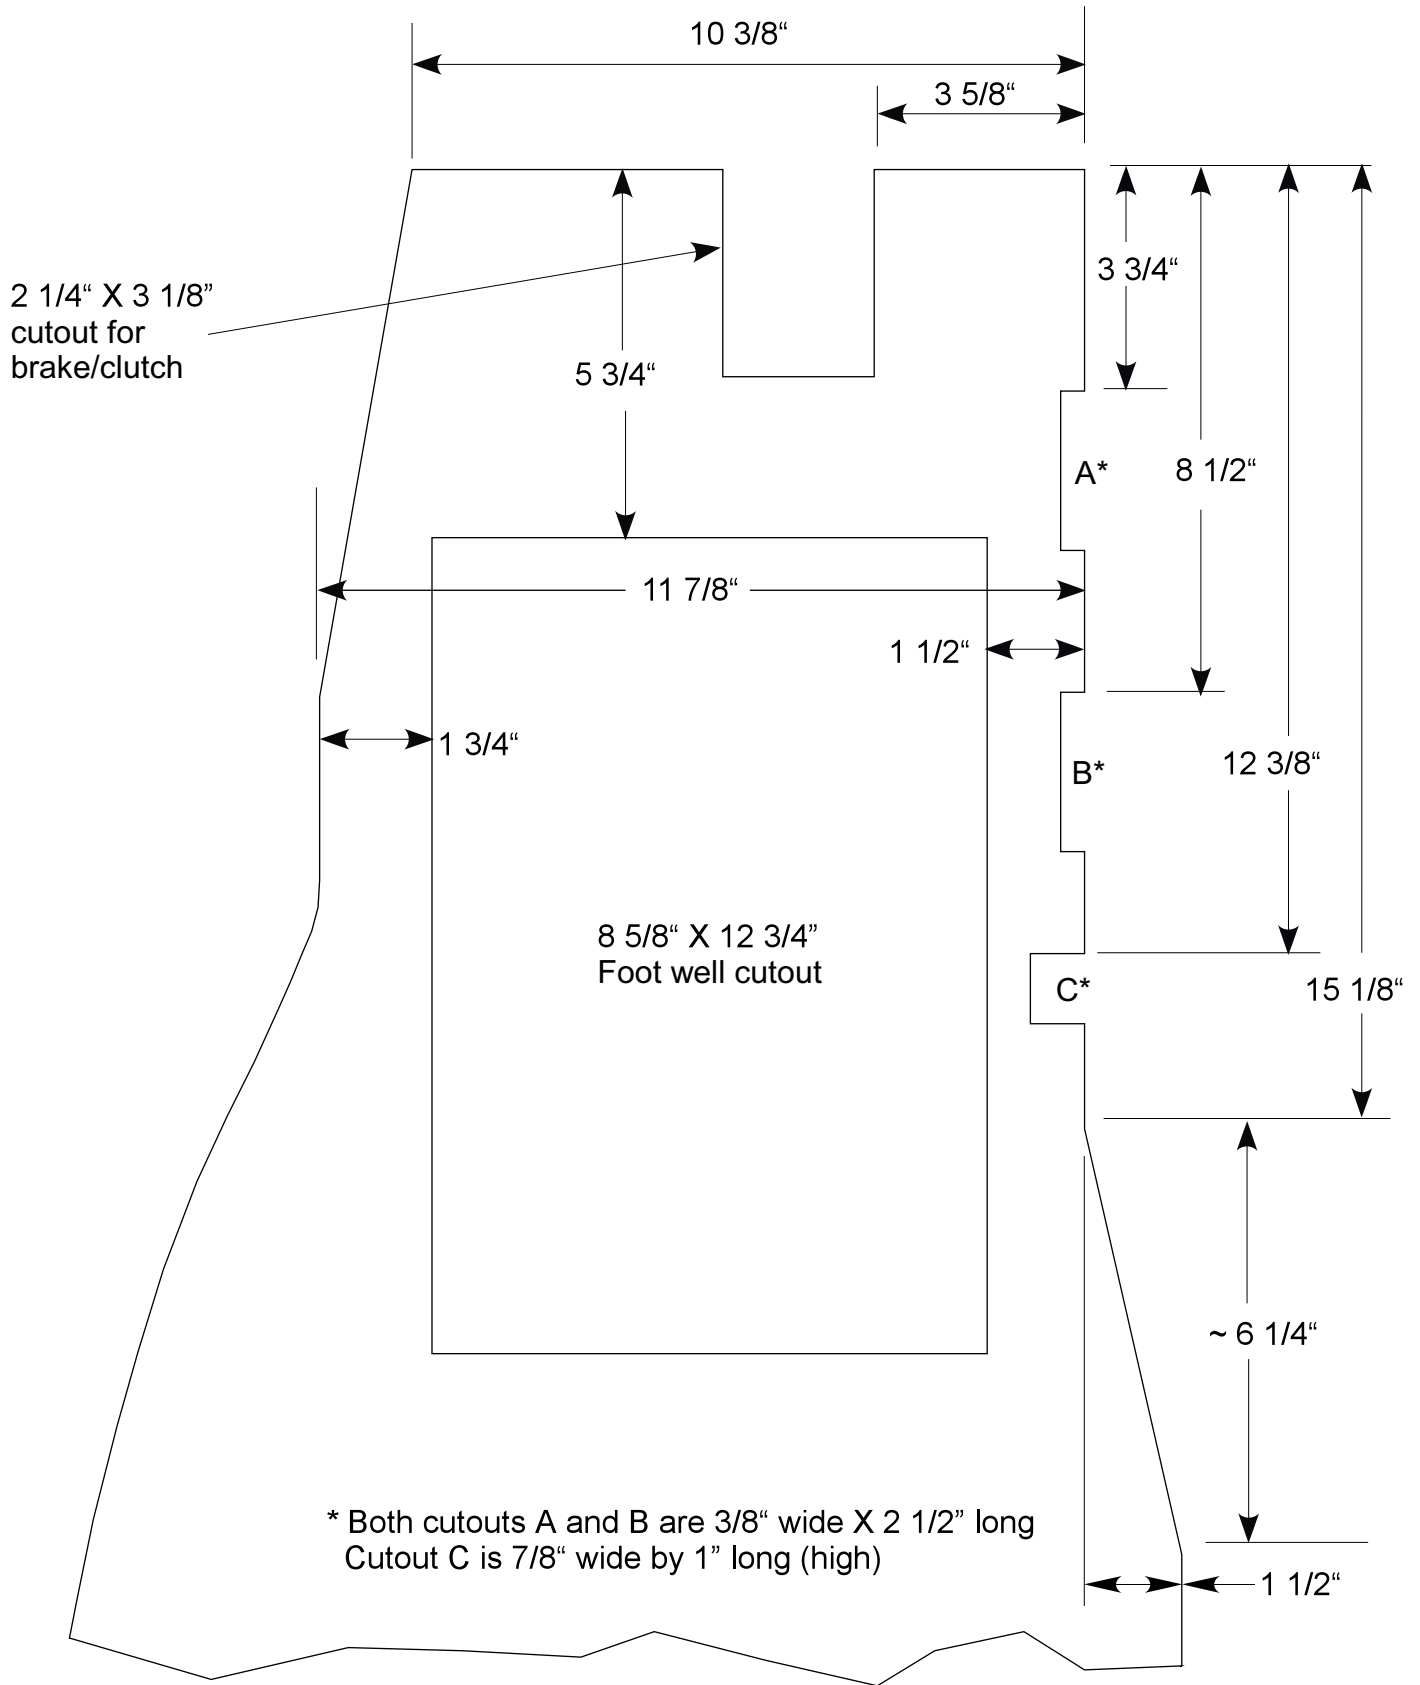

Foot well cutout (driver's side only)
Beginning at chassis number TD 4237 (Nov. 7, 1950)
Rubber padded foot well added


Driver's Side Floorboard Hole Locations

Holes A, B and E thru K are ~ 3/8" I.D. for hold down bolts.
 Holes C, D, L and M are for "T" nuts mounted from back.

**Holes L and M are for seat adjustment brackets.
 Check location and drill after seats are ready to be installed.*

Holes A and B are 5/8" in from the edge.
 Holes C thru I are 1/2" in from the edge.

*Bottom side recesses (3) used as relief for body tub-to-frame mounting bolt heads.




Recesses ~ 1/4 deep
 Check location and clearance to bolt heads.

~ 2 1/2" wide*
 X 1 3/8" high*


Paint all surfaces and all edges with at least two coats of good quality wood primer followed by two coats of semi-gloss black paint.

~1 7/8" wide* X 1 3/8" high*

3 3/8" to centerline*

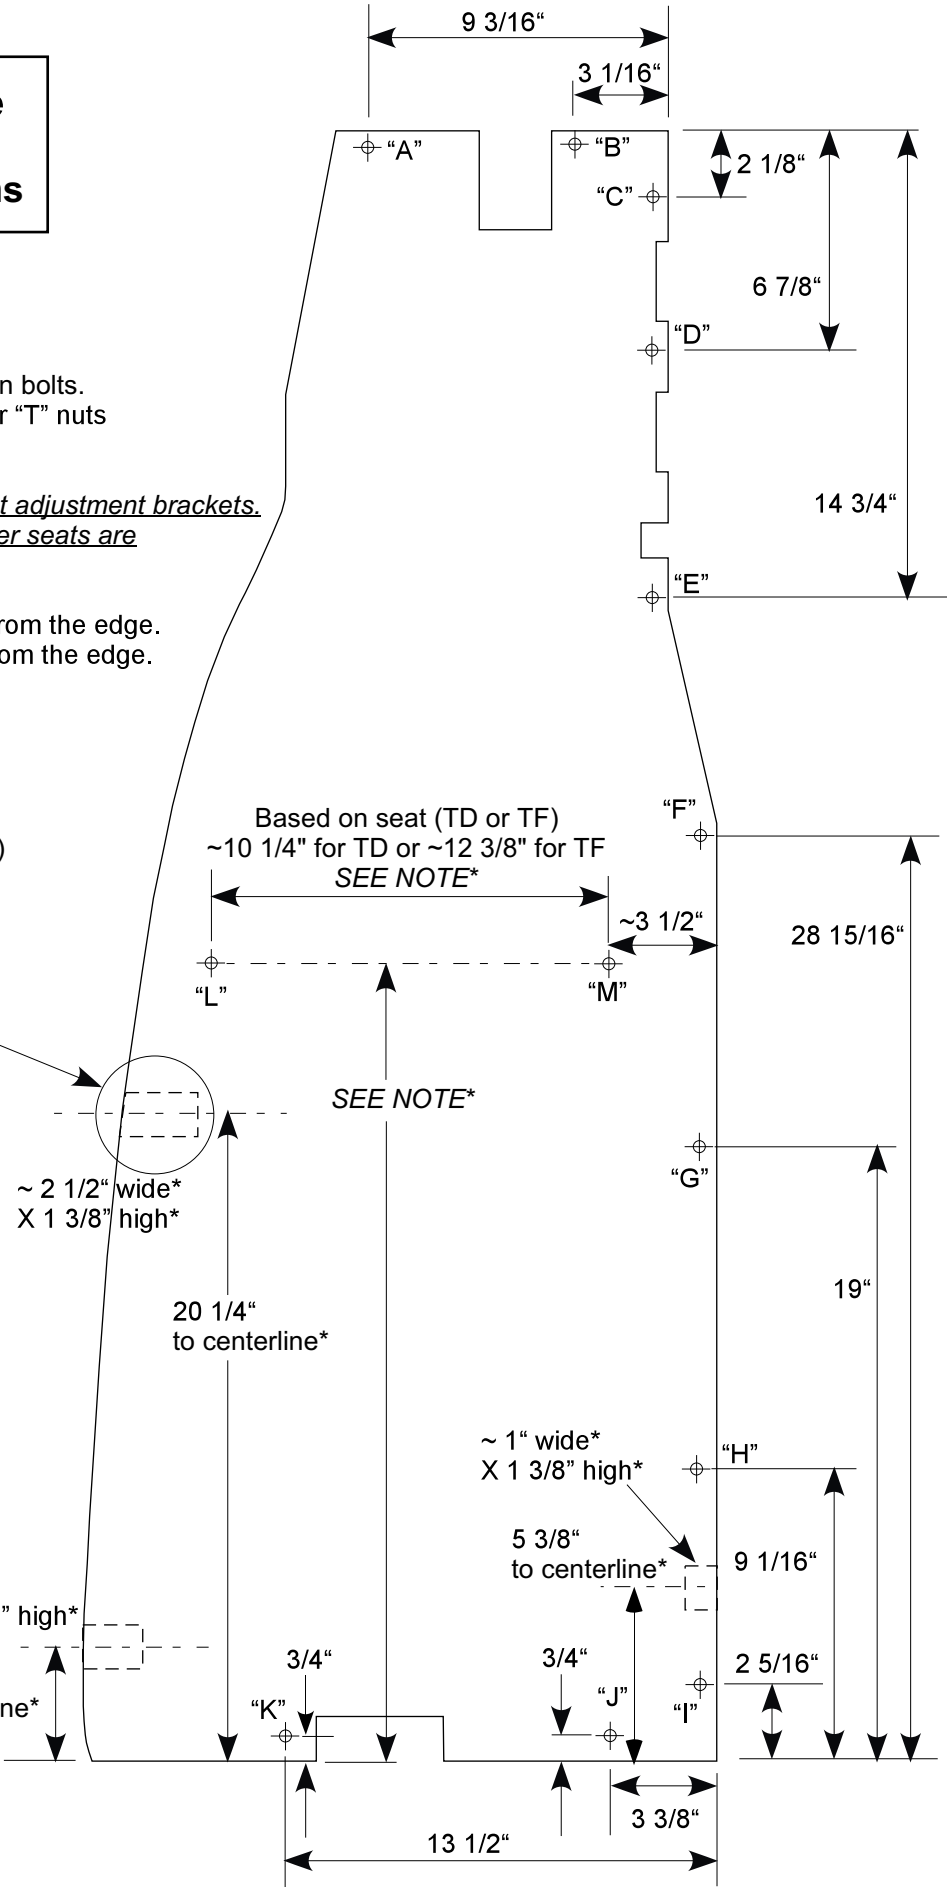

Passenger's Side Floorboard

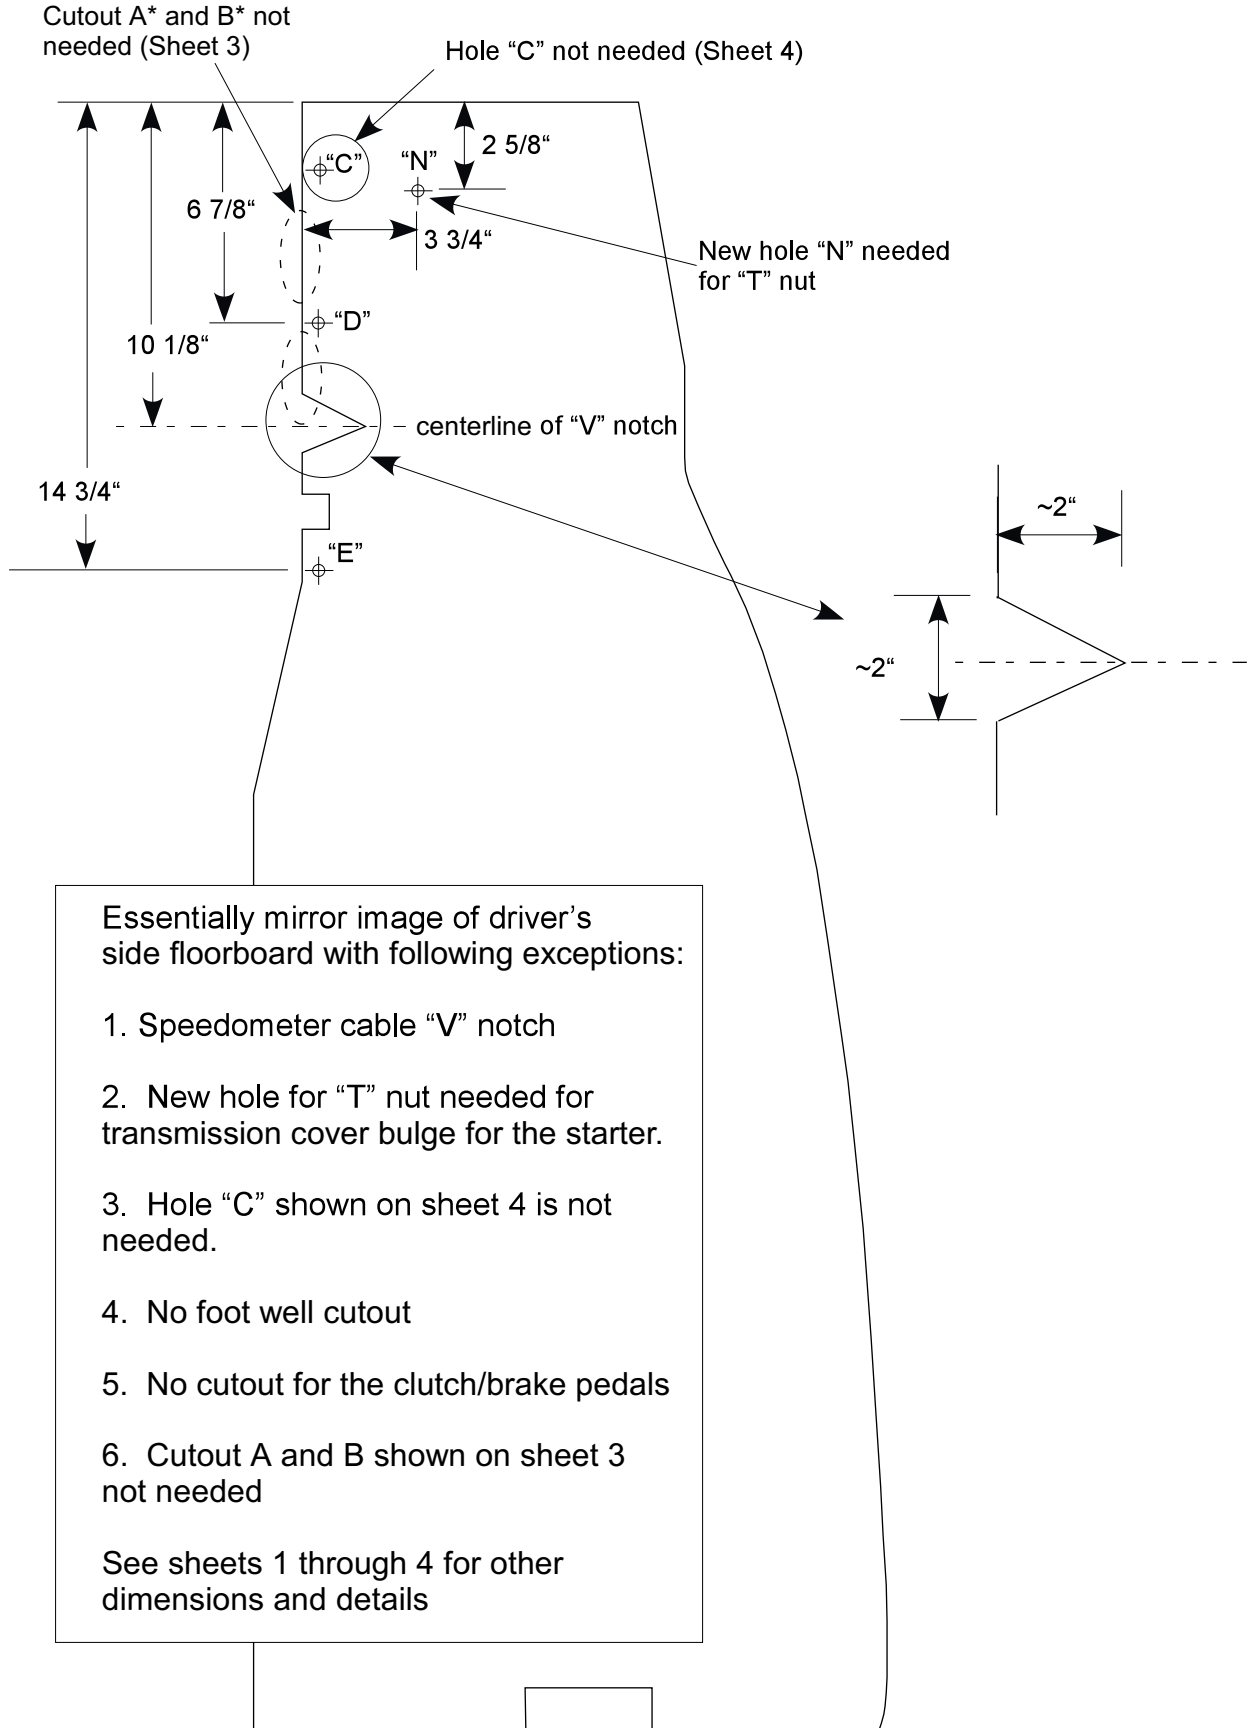

MG TD and TF Floor Board Specifications

Materials:

Wood: 3/8" thick - 3 choices

1. Finnish Birch
2. Baltic Birch
3. Marine grade plywood

Note: Plywood close to the thickness of 0.375" can be used. Baltic birch may be specified in metric thicknesses. Also 1/2" plywood could also be used but 3/8" is actual original size. Some Baltic or Finnish Birch panels may only come in 5 ft. X 5 ft. sizes.

"Tee" Nuts

Holes "C" and "D" take "Tee" nuts sizes 1/4"-20 UNC to accommodate the bolts that hold the floor boards down. 1/4" 26 BSF (British Standard Fine) are original. The BSF nuts may be hard to find.

Holes "L" and "M" take 5/16-18 UNC "Tee" nuts to accommodate the bolts that hold down the front of the seats.

Finish

Paint all surfaces and all edges with at least two coats of good quality wood primer, followed by two coats of semi-gloss black paint.